


SWS/AWS

Skatewheel Spur Conveyor

Gravity Skatewheel Spurs are used to transfer products from one conveying line onto another. They can be used in merging or diverging applications. Ideally used where numerous lines must transfer onto a main conveyor line from work stations or other similar operations.

- 4 Widths
- Powder-Painted Steel or Aluminum Frames
- Right- and Left-Hand Units
- Butt Couplings on One End
- 30-, 45-, and 90-Degree Spurs

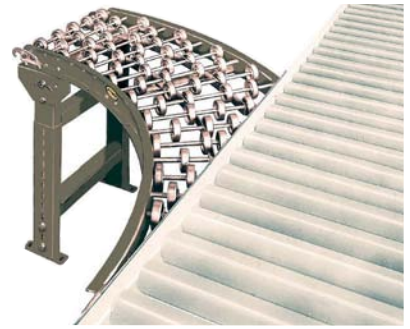

Conveyor shown in green with optional supports
Standard color options:



Steel Frames

Overall Frame Width	Model No.	30° Spur		
		"A"	WPS	Wgts. (lbs.)
12"	SWS-12-30	24 3/8"	51	39
15"	SWS-15-30	30 3/8"	67	43
18"	SWS-18-30	36 3/8"	71	47
24"	SWS-24-30	48 3/8"	83	57

Aluminum Frames

Overall Frame Width	Model No.	30° Spur		
		"A"	WPS	Wgts. (lbs.)
12"	AWS-12-30	24 3/8"	51	26
15"	AWS-15-30	30 3/8"	67	29
18"	AWS-18-30	36 3/8"	71	32
24"	AWS-24-30	48 3/8"	83	38

Overall Frame Width	Model No.	45° Spur		
		"A"	WPS	Wgts. (lbs.)
12"	SWS-12-45	21"	54	39
15"	SWS-15-45	30"	70	43
18"	SWS-18-45	30"	77	47
24"	SWS-24-45	39"	97	57

Overall Frame Width	Model No.	45° Spur		
		"A"	WPS	Wgts. (lbs.)
12"	AWS-12-45	21"	54	26
15"	AWS-15-45	30"	70	29
18"	AWS-18-45	30"	77	32
24"	AWS-24-45	39"	97	38

Overall Frame Width	Model No.	90° Spur				
		"A"	"B"	"R"	WPS	Wgts. (lbs.)
12"	SWS-12-90	30"	39 1/8"	36"	46	67
15"	SWS-15-90	39"	35 5/8"	33"	56	72
18"	SWS-18-90	39"	32 11/16"	30"	60	77
24"	SWS-24-90	51"	39 1/2"	36"	94	107

Overall Frame Width	Model No.	90° Spur				
		"A"	"B"	"R"	WPS	Wgts. (lbs.)
12"	AWS-12-90	30"	39 1/8"	36"	46	45
15"	AWS-15-90	39"	35 5/8"	33"	56	47
18"	AWS-18-90	39"	32 11/16"	30"	60	51
24"	AWS-24-90	51"	39 1/2"	36"	94	71

All weights in catalog are conveyor weights only. Accessories, crating, etc., are not included.